




**SEYMOUR  
MIDWEST**

Mailing Address:  
P.O. Box 1674  
Warsaw, IN 46581-1674

Phone: 844-SEYMOUR  
FAX: 574-267-8508  
[www.seymourmidwest.com](http://www.seymourmidwest.com)

Shipping Address:  
2666 S Country Club Rd  
Warsaw, IN 46580

## ***Application Squeegee*** **Assembly Instructions**

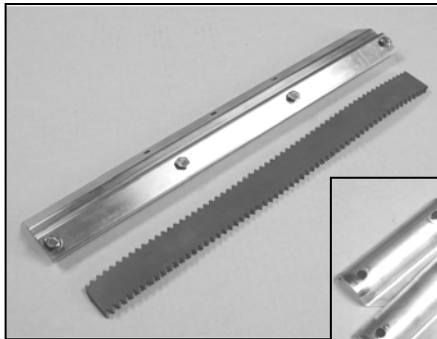


### **Tools Needed for Assembly:**

- 7/16" wrench (two)

### **Parts Shipped with Unit:**

- Head
- Threaded handle adapter or aluminum handle (not pictured)
- Gusset brace (set of 2) – one gusset is labeled if unit comes with threaded handle adapter)
- Bolt bag for brace
- Rubber blade (sold separately)

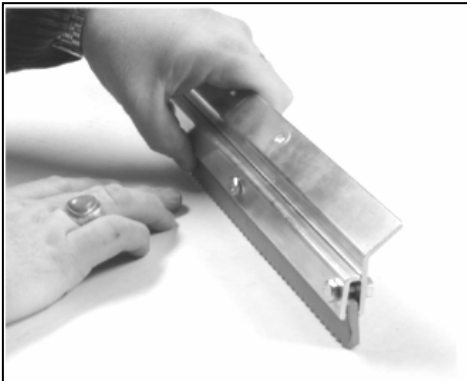


### **Rubber Blade Installation Instructions:**

1. Loosen nuts (do not remove) on head and insert rubber blade.
2. Rest rubber blade on a hard, flat surface (as shown) and adjust blade to ensure it is seated straight in the head and level with the flat surface.
3. Tighten nuts until rubber blade is secure, being careful not to over tighten.

**NOTE:** *It is important when installing, reversing, or replacing the rubber blade that it is installed straight.*

### **To Reverse Rubber Blade:**

1. Loosen the keps nuts and remove the rubber blade.
2. Reverse the rubber blade and reinstall, following the same instructions above.

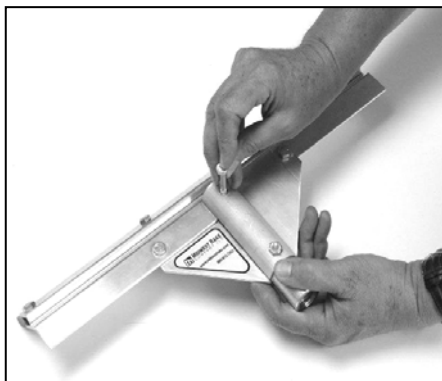

### **Gusset Brace Instructions:**

1. Slide slotted handle or threaded handle adapter over the center hole on the aluminum frame.
2. Position labeled gusset on bottom of adapter, as shown, and the other gusset on top of the adapter. If unit comes with handle, gussets are interchangeable.
3. Insert the two longest bolts through the top gusset, the handle or adapter, and the bottom gusset. Insert the two shortest bolts through the two remaining holes.
4. Tighten all nuts being careful not to over tighten. Over tightening hardware may result in crushing the handle, thereby compromising its strength.

#### **FULL WARRANTY**

*All Seymour Midwest products carry a full warranty against manufacturer defects in quality and workmanship. Products which have been abused or worn out from normal use are excluded from this warranty. We reserve the right to replace or issue credit on an individual basis.*

## **REPLACEMENT PARTS LIST**

*See Reverse Side*

**PK90134**  
**01/21/15**

**APPLICATION SQUEEGEE REPLACEMENT PARTS**

SP10065	Head – 16”
SP10055	Head – 24”
SP10056	Head – 30”
SP10059	Head – 36”
SP10057	Head – 48”
SP30044	Strip – 16” – aluminum for pinching rubber blade
SP30045	Strip – 24” – aluminum for pinching rubber blade
SP30047	Strip – 30” – aluminum for pinching rubber blade
SP30046	Strip – 36” – aluminum for pinching rubber blade
SP30053	Strip – 48” – aluminum for pinching rubber blade
SA20172	Handle – 66” Aluminum Powder-Coated w/ Vinyl Grip
SP20025	Threaded Handle Adapter
SA30009	Braces – Gusset (Set of 2)
SA60023	Bolt Bag: 4 Bolts, 4 Loc Nuts (for Handle Attachment)
RM60014	Bolt 1” - ¼-20 (for strip attachment to head)
RM60035	Wing nut - ¼-20 (for strip attachment to head)

**APPLICATION SQUEEGEE REPLACEMENT RUBBER**

Replacement Rubber (Head Width)	Part Number By Notch Width (Measure from Tip to Tip)					
	No Notch	1/8”	3/16”	1/4”	3/8”	1/2”
16” Neoprene	79005	79025	79045	79065	79085	79105
24” Neoprene	79010	79030	79050	79070	79090	79110
30” Neoprene	79013	79033	79053	79073	79093	79113
36” Neoprene	79015	79035	79055	79075	79095	79115
48” Neoprene	79020	79040	79060	79080	79100	79120
16” EPDM-gray	79205	79225	79245	79265	79285	79305
24” EPDM-gray	79210	79230	79250	79270	79290	79310
30” EPDM-gray	79213	79233	79253	79273	79293	79313
36” EPDM-gray	79215	79235	79255	79275	79295	79315
48” EPDM-gray	79220	79240	79260	79280	79300	79320
16” EPDM-red	79705	79725	79745	79765	79785	79805
24” EPDM-red	79710	79730	79750	79770	79790	79810
30” EPDM-red	79713	79733	79753	79773	79793	79813
36” EPDM-red	79715	79735	79755	79775	79795	79815
48” EPDM-red	79720	79740	79760	79780	79800	79820