




**SEYMOUR
MIDWEST**

Mailing Address:
P.O. Box 1674
Warsaw, IN 46581-1674

Phone: 844-SEYMOUR
FAX: 574-267-8508
www.seymourmidwest.com

Shipping Address:
2666 S Country Club Rd
Warsaw, IN 46580

Topping & Underlayment Squeegee Assembly Instructions

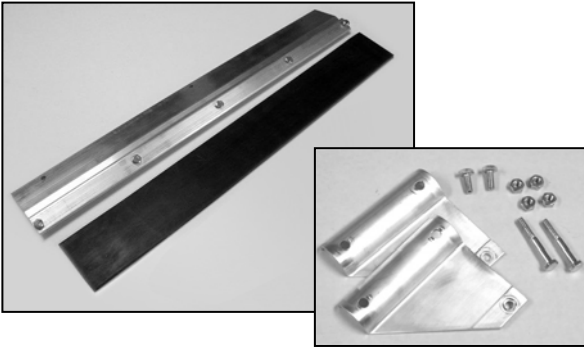


Tools Needed for Assembly:

- 7/16" wrench (two)

Parts Shipped with Unit:

- Head
- Threaded handle adapter or aluminum handle (not pictured)
- Gusset brace (set of 2) – one gusset is labeled if unit comes with threaded handle adapter
- Bolt bag for brace
- Rubber blade (one square edge, one rounded edge)

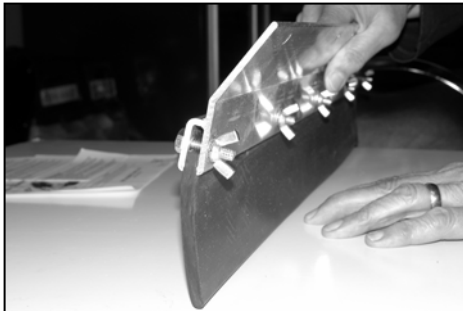

Rubber Blade Installation Instructions:

1. Loosen nuts (do not remove) on head and insert square edge of rubber blade.
2. Rest other edge of rubber blade on a hard, flat surface (as shown) and adjust blade to ensure the square edge is seated straight in the head and level with the flat surface.
3. Tighten nuts until rubber blade is secure, being careful not to over tighten.

NOTE: *It is important when installing or replacing the rubber blade that it be installed straight.*



Gusset Brace Instructions:

1. Slide slotted handle or threaded handle adapter over the center hole on the aluminum frame. (wing nuts on frame should be facing up)
2. Position one gusset on bottom of adapter, as shown, and the other gusset on top of the adapter.
3. Insert the two longest bolts through the top gusset, the handle or adapter, and the bottom gusset. Insert the two shortest bolts through the two remaining holes.
4. Tighten all nuts being careful not to over tighten. Over tightening hardware may result in crushing the handle, thereby compromising its strength.

FULL WARRANTY

All Seymour Midwest products carry a full warranty against manufacturer defects in quality and workmanship. Products which have been abused or worn out from normal use are excluded from this warranty. We reserve the right to replace or issue credit on an individual basis.

REPLACEMENT PARTS LIST
See Reverse Side

PK90434
01/21/15

TOPPING & UNDERLAYMENT SQUEEGEE
REPLACEMENT PARTS LIST

SP10083	Head – 24” (no rubber)
SP30045	Aluminum Strip – 24”
SP50071	Replacement Rubber Blade – 24” w/round edge
SA30009	Brace – gusset (set of 2)
SA20172	Handle – 66” 1 1/8” yellow powder coated aluminum w/black grip
SP50002	Grip – 6” black
SA60023	Bolt Bag: 4 bolts, 4 loc nuts
RM60053	Bolt (for strip attachment to head)
RM60035	Wing nut (for strip attachment to head)
RM60103	Loc Washer – internal tooth