




Mailing Address:
P.O. Box 1674
Warsaw, IN 46581-1674

Phone: 844-SEYMOUR
FAX: 574-267-8508
www.seymourmidwest.com

Shipping Address:
2666 S. Country Club Rd.
Warsaw, IN 46580

“Shingle Saver” Snow Roof Rake

Assembly Instructions

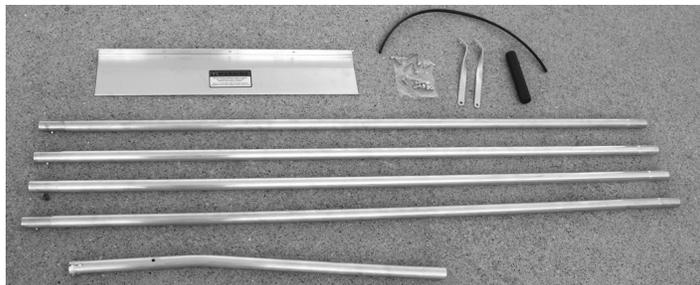

Tools Needed for Assembly:

- 7/16" wrench (two)
- Common Screwdriver
- Pair of pliers (optional)

Parts Shipped with Unit:

- Head
- Hardware Kit
- Handles - 16' Version has 4 (1- 29" Bent, 3- 57" Straight)
21' Version has 5 (1-29" Bent, 4- 57" Straight)

See other side for replacement parts

Shingle Saver Sleeve Assembly:

1. Firmly press the Shingle Saver Sleeve onto the aluminum head by starting at one corner then proceeding along the strip until finished (image A). Once the sleeve is installed, hold the top of the aluminum head and place the sleeve on the floor (or level firm surface) and apply downward pressure to help make the Shingle Saver Sleeve edge straight (image B). The Shingle Saver Sleeves may be purchased separately (#96701).
2. If the sleeve is longer than the aluminum head, it is recommended that the sleeve be trimmed. Another option would be to crimp excess with pliers.




Head Assembly:

1. Assemble the braces to the head using the two smallest 5/8" bolts and loc nuts.
 2. Insert rib of rake head into slot on end of bent handle. Align holes and insert small 1-1/4" bolt.
 3. Align braces with handle and insert longer 1-1/2" bolt. Use wrenches to tighten all loc nuts, being careful **NOT** to over tighten, **DO NOT** crush handle! Over tightening may result in crushing the handle, and will decrease the useful life of the handle.
- NOTE: Do not tighten loc nuts until all hardware is in place.



Handle Assembly:

1. Squeeze the legs of the snap button together and insert it into the hole of the reduced end of the handle (image C). Using a common screwdriver, push the snap button into place (image D). Repeat operation for all handles.
2. To assemble the handles together, depress the snap button and insert the reduced end of the handle into the larger end of the additional handle, making sure to align the holes and the snap button will snap into place securing the handles together. Repeat this step for each additional section.
3. Slip poly grip onto the bell end of one extension handle. Note: Grip will slide easier after placing in a soap and water mixture.



WARNING: This product conducts electricity. Contact with electrical wires or equipment can result in serious injury. Disconnect power from roof and gutter tape before using this product.

FULL WARRANTY

All Seymour Midwest products carry a full warranty against manufacturer defects in quality and workmanship. Products which have been abused or worn out from normal use are excluded from this warranty. We reserve the right to replace or issue credit on an individual basis.

PK90471
01/21/15

SHINGLE SAVER SNOW ROOF RAKE REPLACEMENT PARTS

SA10100	Head - 24" aluminum
SP20029	Handle - 29" bent
SP20058	Handle - 57" straight
SA60088	Hardware Kit (includes 1 pair of braces, bolts, nuts, 4 snap buttons, vinyl grip, Shingle Saver blade)
96758	5' Extension Handle
96701	Shingle Saver Replacement Sleeve
SP50172	4.5" Vinyl Grip